



Dimensions

Unit: mm


RNE-160R

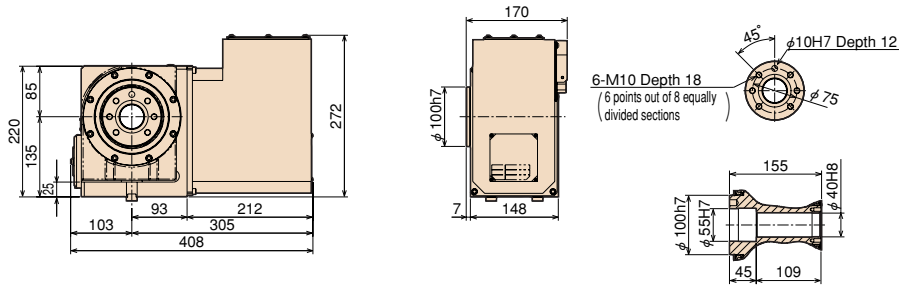


RNE-200R

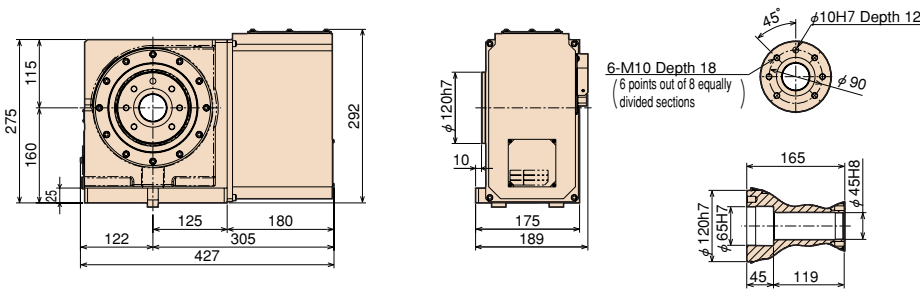

RNE-250R

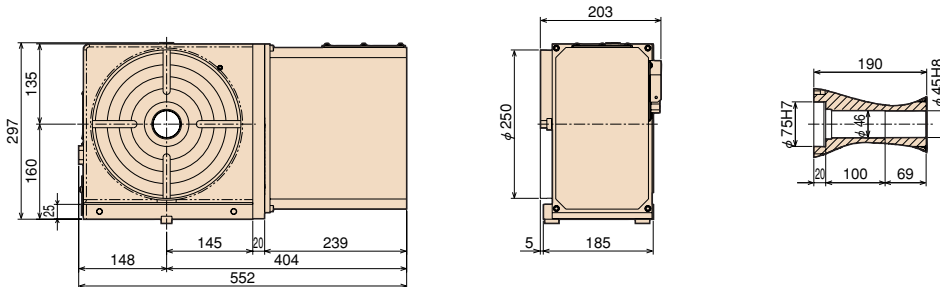

RNE-320R

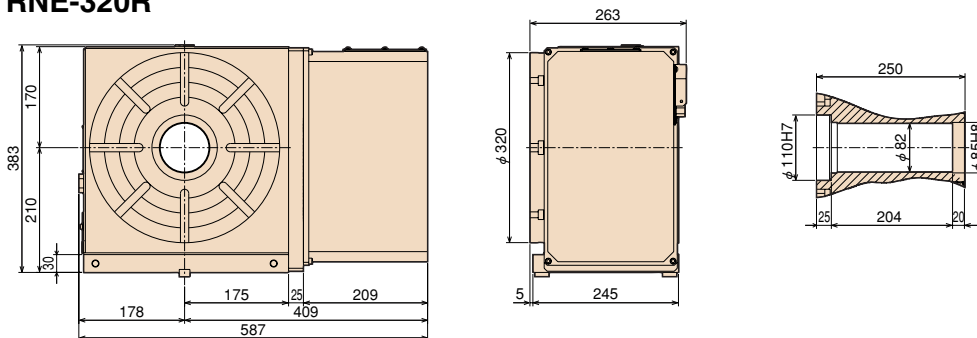

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

RG

RNA
RN

RNE

RNA-B
RNCV-B

RNCM

RBA

RBA-K
RNCK

RCH
RNC

RCV
RNCV

Multi-Spindle
RN-N

RZ

TN

TTNC

THNC

Multi-Spindle
TTNC-N

RC
RH

RUA

TSUA

RTV
RTT

NC Controllers

Accessories


Options

Technical
Information

Clamping block and bolt

Unit: mm

	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RNE-160	2	-	14	-	-	-	-	-	-	-	17	8	60	-	23	12
RNE-200	2	-	18	-	-	-	-	-	-	-	21	11	60	-	28	16
RNE-250	4	40~120	18	25	12	80	12	33	35	22	21	11	65	40	28	16
RNE-320	4	55~147	18	30	15	90	16	31	43	25	21	11	70	46	28	16



Note 1: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Optional)