
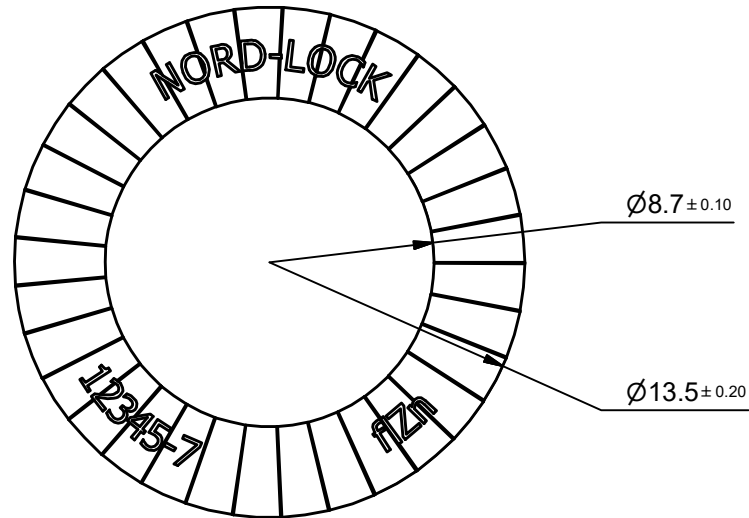
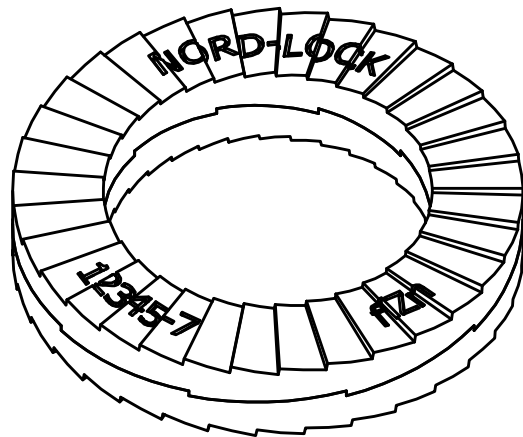


This drawing remains our property. Its use without due authority is forbidden and will lead to legal action

Notes:

1. Bolt size: M8, UNC 5/16"
2. Material EN 1.7182
3. Hardness $\geq 465\text{HV1}$
4. Coating: Zinc Flake, Delta Protekt - KL100 + VH302GZ
5. Corrosion resistance: 1000 hours neutral salt spray test according to ISO9227
6. RoHS and ELV Compliant
7. Pre-assembled in glued pairs
8. Item weight: 0,15 kg/100 pairs
9. Number of pairs per box: 200 pairs
10. Approved for use with bolts up to class 12.9
11. Marked on one of the serrated surfaces with Nord-Lock, batch number and material/coating code.

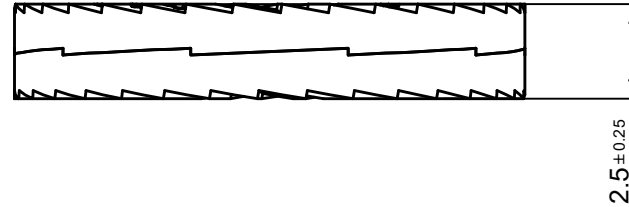

Designed by PHILJOHA	Date 2019-01-22	General Tolerance ISO2768-mK	Article Number 1231	Placement 	Scale 5 : 1
 NORD-LOCK [®] <i>Bolt securing systems</i>			Title NL8		
			Drawing Number 10012312-12	Format A4	Revision A