



Design Features include:

- Corrosion-resistant center member, flex element, hub and hardware lowering the cost of ownership and extending service life
- Low weight allowing easy installation
- High strength to weight ratio providing reduced vibration
- Low coefficient of thermal expansion giving dimensional stability and reduced stresses
- Continuous fiber composite spacer flange resulting in infinite fatigue life and low cost of ownership
- Unitized flex element and high misalignment capacity for reduced maintenance

Applications:

- Cooling towers
- Vertical pumps

Industry Compliant:

- ISO 14691
- ATEX II 2G c T5

Special design options:

- Brake disc
- Backstop
- Electrically insulated

Rexnord Addax Composite Coupling

Customer-focused solutions.

Reliable Performance.

Trusted Brands.


You want a trusted name when it comes to providing engineered power transmission products that improve productivity and efficiency. Rexnord® provides superior products for your industrial applications world wide. We work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment downtime.

Rexnord Addax

Rexnord pioneered and introduced the first advanced composite couplings to the cooling tower industry in 1987. With over 50 000 Rexnord Addax® composite couplings installed on every continent around the world over the past 25 years, Rexnord has the most experience of any composite cooling tower manufacturer. The Rexnord Addax Composite Cooling Tower Coupling delivers the best value for the cooling tower industry by providing excellent features such as corrosion resistance, high-misalignment capacity, excellent fatigue resistance, low weight and ease of installation.




ATEX II 2GD c T5

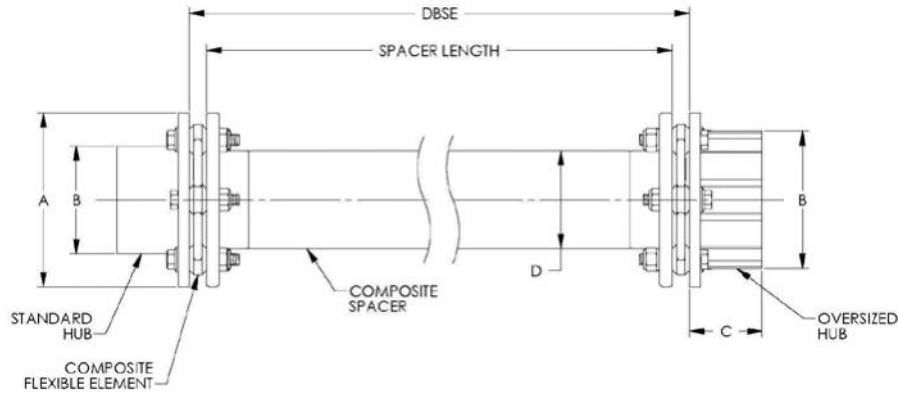

| Model Series | Spacer & Flange Material | Max DBSE @ 1780 RPM @ 1.15SF (in) mm | Max DBSE @ 1480 RPM @ 1.15SF (in) mm | Max Bore | | A (in) mm | B (in) mm | | C (in) mm | | D (in) mm | Min DBSE (in) mm | Min Bore (in) mm |
|--------------|--------------------------|--------------------------------------|--------------------------------------|-------------------------|-------------------|--------------|------------------|-------------------|-------------------------|-------------------|---------------|------------------|------------------|
| | | | | Standard (in) mm | Oversized (in) mm | | Standard (in) mm | Oversized (in) mm | Standard (in) mm | Oversized (in) mm | | | |
| 350.275 | LRF | (95) / 2 413 | (106) / 2 692 | | | | | | | | | | |
| | LRA | (107) / 2 718 | (119) / 3 023 | (2,13) / 55 | (2,38) / 65 | (5,25) / 133 | (3,06) / 78 | (4) / 102 | (1,81) / 46 | (2,6) / 66 | (2,75) / 70 | (5,4) / 137 | (0,63) / 16 |
| | LRR | (114) / 2 896 | (126) / 3 200 | | | | | | | | | | |
| 375.275 | LRF | (95) / 2 413 | (106) / 2 692 | | | | | | | | | | |
| | LRA | (107) / 2 718 | (119) / 3 023 | (2,13) / 55 | (2,38) / 65 | (5,25) / 133 | (3,06) / 78 | (4) / 102 | (1,81) / 46 | (2,6) / 66 | (2,75) / 70 | (5,4) / 137 | (0,63) / 16 |
| | LRR | (114) / 2 896 | (126) / 3 200 | | | | | | | | | | |
| 450.275 | LRF | (95) / 2 413 | (106) / 2 692 | | | | | | | | | | |
| | LRA | (107) / 2 718 | (119) / 3 023 | | | | | | | | | | |
| | LRR | (114) / 2 896 | (126) / 3 200 | (2,25) / 55 | (2,88) / 75 | (5,25) / 133 | (3,15) / 80 | (4) / 102 | (1,81) / 46 | (2,63) / 67 | (2,75) / 70 | (5,4) / 137 | (0,63) / 16 |
| | LRX | (128) / 3 251 | (141) / 3 581 | | | | | | | | | | |
| 485.338 | LRF | (100) / 2 540 | (113) / 2 870 | | | | | | | | | | |
| | LRA | (116) / 2 946 | (127) / 3 226 | (2,63) / 70 | (3,38) / 85 | (6,00) / 152 | (3,72) / 94 | (4,75) / 121 | (2,5) / 63,5 | (2,75) / 70 | (3,38) / 86 | (8,0) / 203 | (0,87) / 22 |
| | LRR | (127) / 3 226 | (140) / 3 556 | | | | | | | | | | |
| 485.425 | LRR | (141) / 3 581 | (154) / 3 912 | (2,63) / 70 | (3,38) / 85 | (6,00) / 152 | (3,72) / 94 | (4,75) / 121 | (2,5) / 63,5 | (2,75) / 70 | (4,25) / 108 | (8,0) / 203 | (0,87) / 22 |
| | LRX | (154) / 3 912 | (169) / 4 293 | | | | | | | | | | |
| 485.625 | LRR | (170) / 4 318 | (189) / 4 800 | (2,63) / 70 | (3,38) / 85 | (6,00) / 152 | (3,72) / 94 | (4,75) / 121 | (2,5) / 63,5 | (2,75) / 70 | (6,25) / 159 | (9,5) / 241 | (0,87) / 22 |
| 650.425 | LRA | (133) / 3 378 | (148) / 3 759 | | | | | | | | | | |
| | LRR | (141) / 3 581 | (154) / 3 912 | (3,13) / 80 | (4,01) / 100 | (6,75) / 171 | (4,25) / 108 | (5,15) / 133 | (2,56) / 65 | (2,75) / 70 | (4,25) / 108 | (6) / 152 | (1,00) / 25 |
| | LRX | (154) / 3 912 | (169) / 4 293 | | | | | | | | | | |
| 650.625 | LRR | (170) / 4 318 | (189) / 4 800 | (3,13) / 80 | (4,01) / 100 | (6,75) / 171 | (4,25) / 108 | (5,15) / 133 | (2,56) / 65 | (2,75) / 70 | (6,25) / 159 | (9,5) / 241 | (1,00) / 25 |
| | LRX | (186) / 4 725 | (208) / 5 283 | | | | | | | | | | |
| 650.825 | LRR | (193) / 4 902 | (215) / 5 461 | (3,13) / 80 | (4,01) / 100 | (6,75) / 171 | (4,25) / 108 | (5,15) / 133 | (2,56) / 65 | (2,75) / 70 | (8,25) / 210 | (9,5) / 241 | (1,00) / 25 |
| | LRX | (209) / 5 309 | (232) / 5 893 | | | | | | | | | | |
| 850.625 | LRA | (157) / 3 988 | (172) / 4 369 | std. short (3,125) / 75 | | | | | std. short (2,5) / 63,5 | | | | |
| | LRR | (170) / 4 318 | (189) / 4 800 | std. Long (4,13) / 105 | (5,06) / 130 | (9,0) / 229 | (5,8) / 147 | (7,5) / 191 | std. Long (3,31) / 84,1 | (3,5) / 89 | (6,25) / 159 | (14,2) / 361 | (1,00) / 25 |
| | LRX | (186) / 4 725 | (208) / 5 283 | | | | | | | | | | |
| 850.825 | LRR | (193) / 4 902 | (215) / 5 461 | std. short (3,125) / 75 | | | | | std. short (2,5) / 63,5 | | | | |
| | LRX | (209) / 5 309 | (232) / 5 893 | std. Long (4,13) / 105 | (5,06) / 130 | (9,0) / 229 | (5,8) / 147 | (7,5) / 191 | std. Long (3,31) / 84,1 | (3,5) / 89 | (8,25) / 210 | (14,2) / 361 | (1,00) / 25 |
| 850.1025 | LRX | (229) / 5 817 | (253) / 6 426 | std. short (3,125) / 75 | (5,06) / 130 | (9,0) / 229 | (5,8) / 147 | (7,5) / 191 | std. short (2,5) / 63,5 | (3,5) / 89 | (10,25) / 260 | (14,2) / 361 | (1,00) / 25 |
| 850.1275 | LRX | (245) / 6 223 | (275) / 6 985 | std. Long (4,13) / 105 | (5,06) / 130 | (9,0) / 229 | (5,8) / 147 | (7,5) / 191 | std. short (2,5) / 63,5 | (3,5) / 89 | (12,75) / 324 | (14,2) / 361 | (1,00) / 25 |

LRF = Fiberglass LRA = Amalgamation (carbin fiber & fiberglass) LRR = Standard carbon fiber LRX = Special carbon fiber

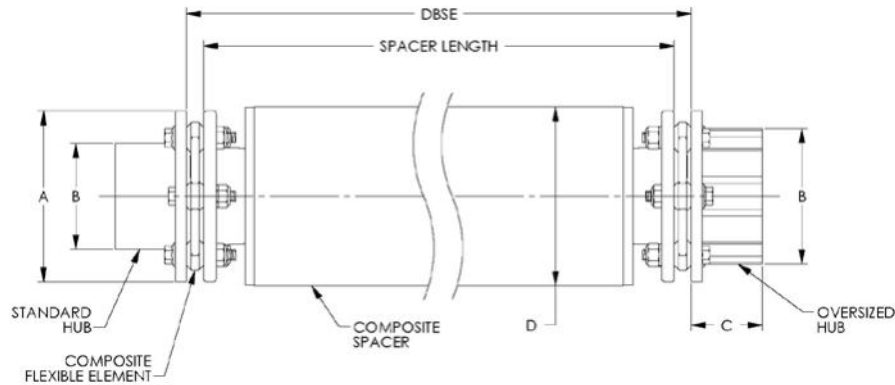

| Model Series | Spacer & Flange Material | Continuous Torque @ 1.0 SF | Peak Overload Torque | Weight @ Min DBSE | WR ² @ Min DBSE | Weight change per length | WR ² change per length |
|--------------|--------------------------|----------------------------|----------------------|-------------------|--|--------------------------|--|
| | | (in-lb) / Nm | (in-lb) / Nm | (lbs) / kg | (lb-in ²) / kgm ² | (lb/in) / kg/m | (lb-in ² /in) / kgm ² /m |
| 350.275 | LRF | (3 617) / 408 | (5 425) / 613 | (13,8) / 6,2 | (32) / 0,0093 | (0,07) / 1,5 | (0,13) / 0,0015 |
| | LRA | | | | | (0,06) / 1,2 | (0,11) / 0,0013 |
| | LRR | | | | | (0,06) / 1,1 | (0,10) / 0,0012 |
| 375.275 | LRF | (5 311) / 600 | (7 967) / 900 | (13,8) / 6,2 | (32) / 0,0093 | (0,07) / 1,5 | (0,13) / 0,0015 |
| | LRA | | | | | (0,06) / 1,2 | (0,11) / 0,0013 |
| | LRR | | | | | (0,06) / 1,1 | (0,10) / 0,0012 |
| 450.275 | LRF | (7 250) / 820 | (10 875) / 1 229 | (12,9) / 5,9 | (32) / 0,0093 | (0,07) / 1,5 | (0,13) / 0,0015 |
| | LRA | | | | | (0,06) / 1,2 | (0,11) / 0,0013 |
| | LRR | | | | | (0,06) / 1,1 | (0,10) / 0,0012 |
| | LRX | | | | | (0,06) / 1,2 | (0,10) / 0,0012 |
| 485.338 | LRF | (11 000) / 1 243 | (16 500) / 1 864 | (23,4) / 10,6 | (47) / 0,014 | (0,09) / 1,8 | (0,24) / 0,0029 |
| | LRA | | | | | (0,08) / 1,5 | (0,21) / 0,0024 |
| | LRR | | | | | (0,07) / 1,4 | (0,19) / 0,0022 |
| 485.425 | LRR | (11 000) / 1 243 | (16 500) / 1 864 | (24,0) / 10,9 | (74) / 0,022 | (0,09) / 1,7 | (0,38) / 0,0044 |
| | LRX | | | | | (0,09) / 1,8 | (0,39) / 0,0045 |
| 485.625 | LRR | (11 000) / 1 243 | (16 500) / 1 864 | (26,5) / 12,0 | (92) / 0,027 | (0,13) / 2,6 | (1,2) / 0,015 |
| 650.425 | LRA | (18 275) / 2 065 | (27 415) / 3 097 | (31,5) / 14,3 | (122) / 0,036 | (0,10) / 1,9 | (0,42) / 0,0049 |
| | LRR | | | | | (0,089) / 1,7 | (0,38) / 0,0044 |
| | LRX | | | | | (0,092) / 1,8 | (0,39) / 0,005 |
| 650.625 | LRR | (18 275) / 2 065 | (27 415) / 3 097 | (34,4) / 15,6 | (141) / 0,041 | (0,13) / 2,6 | (1,2) / 0,014 |
| | LRX | | | | | (0,14) / 2,7 | (1,3) / 0,015 |
| 650.825 | LRR | (18 275) / 2 065 | (27 415) / 3 097 | (37,9) / 17,2 | (194) / 0,056 | (0,18) / 3,4 | (2,9) / 0,033 |
| | LRX | | | | | (0,18) / 3,6 | (3,0) / 0,035 |
| 850.625 | LRA | (36 200) / 4 090 | (54 300) / 6 135 | (63,6) / 28,8 | (440) / 0,130 | (0,15) / 2,9 | (1,4) / 0,016 |
| | LRR | | | | | (0,13) / 2,6 | (1,2) / 0,014 |
| | LRX | | | | | (0,14) / 2,7 | (1,3) / 0,015 |
| 850.825 | LRR | (36 200) / 4 090 | (54 300) / 6 135 | (68,5) / 31,0 | (512) / 0,15 | (0,18) / 3,4 | (2,9) / 0,033 |
| | LRX | | | | | (0,18) / 3,6 | (3,0) / 0,035 |
| 850.1025 | LRX | (36 200) / 4 090 | (54 300) / 6 135 | (74,8) / 33,9 | (657) / 0,19 | (0,23) / 4,4 | (5,8) / 0,067 |
| 850.1275 | LRX | (36 200) / 4 090 | (54 300) / 6 135 | (78,4) / 35,6 | (768) / 0,22 | (0,28) / 5,5 | (11,3) / 0,13 |

The standard weight and inertia (WR²) values are at minimum DBSE and standard minimum bore for a complete assembly. To determine the total weight or inertia subtract the minimum DBSE from the total DBSE required and multiply that value times the WT and/or WR² change per length then add that calculated WT or WR² to the minimum DBSE values. Values may vary slightly depending on your actual bore and key size.

Selection Process

$$\text{System Torque (Nm)} = \frac{\text{kW} * 9549}{\text{rpm}} * 2.0$$

CTI recommends a service factor of 2.0 for cooling tower applications

Consult general dimension chart for maximum span using 1.15 safety factor

Consult general dimension chart for maximum bore size

Ordering Instruction

| L | R | F, A, R, X | Table | Table | Stainless | S=stainless M=monel | | | |
|----------|------------|----------------------------|-------|--------|--------------|------------------------|------|--------|--------|
| Longspan | Reinforced | Spacer and Flange Material | Model | Series | Hub Material | Hardware Material | DBSE | Bore 1 | Bore 2 |

