FABCO-AIR

Prices effective September 1, 2011

PNEUMATIC ROTARY ACTUATORS



FRA.C-09

FABCO-AIR

FRA Series ROTARY ACTUATOR



Specifications

100 psi max.

Model			FRA						
Action	D	ouble acti	ng with m	nagnetic	piston				
Bore Size	e	16	ø2	0	ø25	5			
Media		С	ompresse	ed air					
Min. operating pressure	1.5 k (0.15 M	gf/cm² lpa) 21psi		0.6 kg (0.06 M					
Max. operating pressure	7 kgf/cm ² (0.7 Mpa) 100 psi								
Typ. rotational speed	(at	71 psi - no	o load) 0.2	~1 sec/90)°				
Temperature range	-10°	°C(14°F) ~	+70°C(158	3°F) filtere	d dry air				
Lubrication			None requ	lired					
Output torque		S	ee chart on j	page 3					
Allowable kinetic energy	0.03kgf.c	cm(0.026lbf.in)	0.08kgf.cm (0).069lbf.in)	0.15kgf.cm	(0.130lbf.in)			
Weight	300g	355g	431g	515g	682g	824g			
Conversions	inc	h = mm x	0.0394						

conversions psi= kgf/cm² x 14.2 psi= MPa x 145 inch = mm x 0.0394 ounceforce in = kgf cm x 13.9 ounce = $q \times 0.035$

Price List


Rotation Angle	FRA16	FRA20	FRA25
90°	\$116.70	\$158.75	\$191.25
180°	128.35	175.05	208.80
Seal Kit	FRA16-SK 12.35	FRA20-SK 13.70	FRA25-SK 14.35

Features

1. Magnetic pistons are standard on all models.

- 2. Compact design saves space.
- 3. Rectangular body design has end caps with ports in one end and adjusting screws at opposite end.
- 4. Rack and pinion mechanism designed to minimize backlash.
- 5. Adjustments for rotation angles to fit your application.

How to order

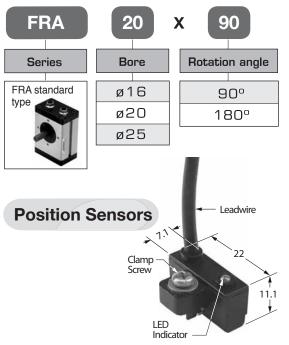


See specifications in the sensor selection guide below. Please order sensors and female cordsets separately from charts below.

Part No.	Price
CFC-1M	\$15.05
CFC-2M	16.85
CFC-5M	21.30
	CFC-1M CFC-2M

	Sensor Selection Guide	Prewired 9 ft. Leadwire	Quick Disconnect*							
Sensor Type	Electrical Characteristics	Part No. Price	Part No. Price							
Reed (LED)	5-120 VDC/VAC, 0.03 Amp Max current, 4 Watt Max., 2.0 voltage drop	9P49-000-002 \$13.95	9P49-000-302\$16.60							
Electronic (LED)	Sourcing PNP 5-28 VDC, 0.20 Amp Max current, 1.0 voltage drop	9P49-000-031 27.10	9P49-000-33129.70							
Electronic (LED)	Sinking NPN 5-28 VDC, 0.20 Amp Max current, 1.0 voltage drop	9P49-000-032 27.10	9P49-000-33229.70							
	*Note: Quick disconnect styles are supplied with 6 inch pigtail with male connector.									



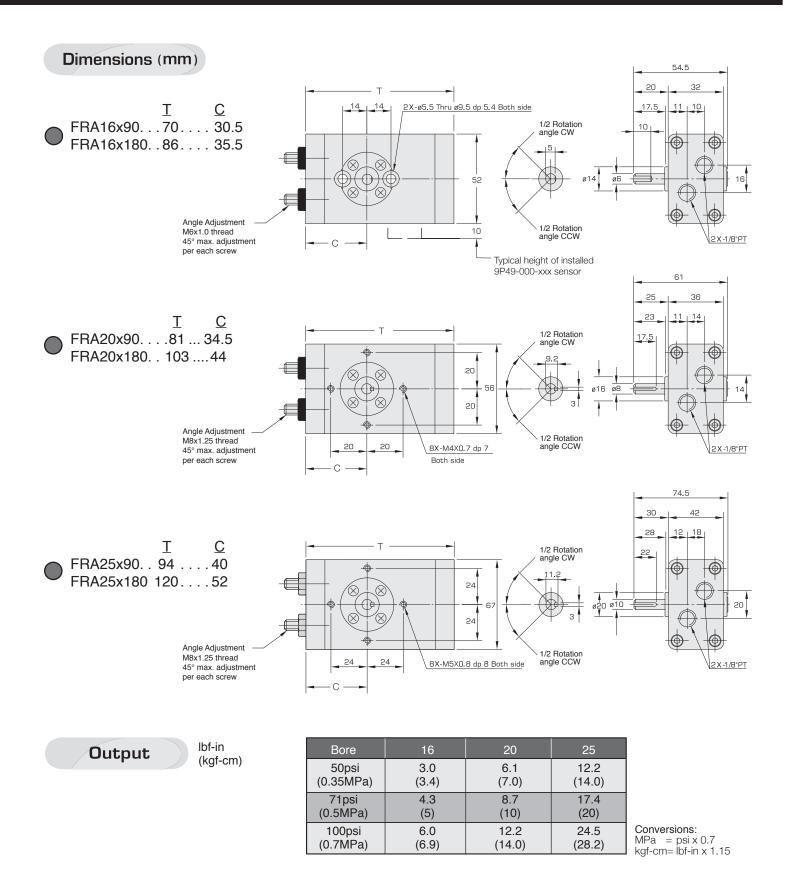

11-11-09

FABCO-AIR

FRC Series ROTARY ACTUATOR

ø16

Specifications

Model

Action

Bore Size

150 psi max.

ø40

1 : (: 2 P	(

- 1. Magnetic pistons are standard on all models.
- 2. Compact design saves space.
- 3. Rectangular body design has end caps with ports and adjusting screws.
- 4. Rack and pinion mechanism designed to minimize backlash.
- 5. Rotation adjustment screws are standard.
- 6. Adjustable air cushions are standard on all models.

Construction

7. Cushioning with shock absorbers is available.

Media Compressed air Max. operating pressure 10.2 kgf/cm² (1Mpa) 150 psi Min. operating pressure 1 kgf/cm² (0.1Mpa) 15 psi 0° ~ 190° Adjustable rotation Max. rotation angle 190° Temperature range 0°C(32°F) ~ +60°C(140°F) Lubrication None required Typical rotational (No load - 71 psi) 0.2 ~ 1 Sec/90° speed See chart on page 6 Output torque 1100 6200 Weight (g) 1400 2200 3800

ø20

psi = kgf/cm² x 14.2 psi = MPa x 145 inch = mm x 0.0394 ounceforce in = kgf cm x 13.9ounce = g x 0.035

Material

FRC

Double acting with magnetic piston


ø25

ø32

Part lists

NO

Description

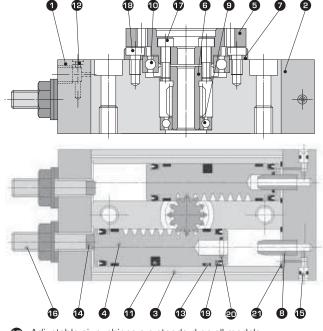

Adjustable air cushions are standard on all models. Engagement is approximately 45° before each end of full 180° rotation on all bore sizes.

ADJUSTING SCREWS ARE NOT RETAINED. USE CAUTION WHEN MAKING ADJUSTMENTS.

Shock absorbers can be substituted in place of the adjustable screws on all bore sizes and used as hard stops for rotational adjustment. See "How to Order" page 5 for shock absorber selection. 0 Aluminum black anodized Front end cover 9 Rear end cover Aluminum black anodized 0 Hard anodized aluminum alloy Housing 4 Rack Stainless steel 6 Aluminum alloy Gear cover 6 Case hardened alloy steel Pinion 0 Bearing cover Aluminum alloy Rear cushion spear 8 Aluminum alloy Θ Ball bearing High carbon - high chrome bearing steel 10 High carbon - high chrome bearing steel Ball bearing Ð Magnet Magnet material Ð Steel ball Medium carbon steel B Wear ring Fluoride resin 14 Bumper Plastic Ð Cushion needle screw Stainless steel 16 Adjustable screw Medium carbon steel D Hexagon screw Medium carbon steel 18 Screw Medium carbon steel

Qty

1

1

1

2

1

1

1

2

1

1

4

4

4

2

2


2

8

6

FABCO-AIR ROTARY ACTUATOR

How to order

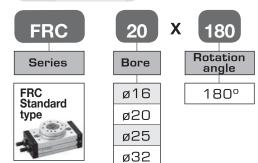

ø40

Pricing

Rotation Angle	FRC16	FRC20	FRC25	FRC32	FRC40
180°	\$315.05	\$350.50	\$396.20	\$508.90	\$705.90
Shock Absorber	FSA1007-AN \$34.90	FSA1007-AN \$34.90	FSA1412-AN \$48.00	FSA1412-AN \$48.00	FSA2015-AN \$55.15

These shock absorbers are sized for general conditions and should be suitable for a wide variety of applications. Extreme loads or speeds may require other shock absorbers sizes.

Sool Kito	FRC16	FRC20	FRC25	FRC32	FRC40
Seal Kits	FRC16-SK	FRC20-SK	FRC25-SK	FRC32-SK	FRC40-SK
	\$23.10	\$32.55	\$28.35	\$20.65	\$38.50

Position Sensors

9Q49 Oval Sensor for sizes Ø16 –Ø25




9C49 Round Sensor for all sizes

Please order sensors and female cordsets separately.


Using 9C49 Sensors requires use of an adapter #TD11047 (included with 9C49-200-xxx sensors) which allows fitting these 4mm round sensors into any of the sensor slots. The adapter is also available separately at no charge.

Female Cord Sets	Part No.	Price
1 Meter	CFC-1M	\$15.05
2 Meters	CFC-2M	16.85
5 Meters	CFC-5M	21.30

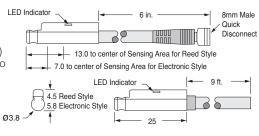


9C49 4	mm Round Sensor Selection Guide for All Sizes	Prewired 9 ft. Leadwire	Quick Disconnect*
Sensor Type	Electrical Characteristics	Part No. Price	Part No. Price
Reed (LED)	5-120V AC/DC, 0.04 Amp Max current, 4 Watt Max, 2.5 voltage drop	9C49-200-002 \$20.25	9C49-200-302 .\$27.00
Electronic (LED)	Sourcing PNP 6-30 VDC, 0.2 Amp Max current, 6 Watt max., 1.5 voltage drop	9C49-200-031 28.65	9C49-200-331 33.25
Electronic (LED)	Sinking NPN 6-30 VDC, 0.2 Amp Max current, 6 Watt max., 1.5 voltage drop	9C49-200-032 28.65	9C49-200-332 33.25
0040 6 2m			
9049 0.311	m Oval Sensor Selection Guide for Sizes Ø16 – Ø25	Prewired 9 ft. Leadwire	Quick Disconnect*
Sensor Type	Electrical Characteristics	Prewired 9 ft. Leadwire Part No. Price	Quick Disconnect* Part No. Price
Sensor Type	Electrical Characteristics	Part No. Price	Part No. Price
Sensor Type Reed (LED)	Electrical Characteristics 5-120V AC/DC, 0.03 Amp Max current, 4 Watt Max, 2.0 voltage drop	Part No. Price 9Q49-000-002 \$20.20	Part No. Price 9Q49-000-302 \$22.85

Rotation direction & adjusting instruction

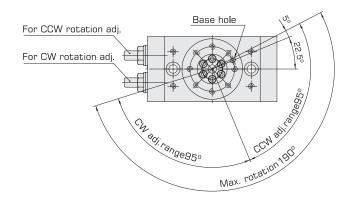

Inertia force and rotation time

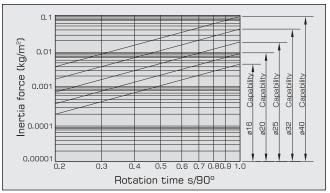


Specifications and prices subject to change without notice or incurring obligation.

2-23-15




Allowable load

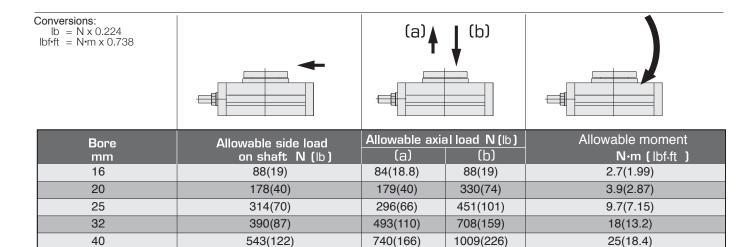


Output	lbf-in	Bore	16	20	25	32	40
	(kgf-cm)	50 psi (0.35MPa)	9 (10.4)	16.5 (19.0)	27 (31.0)	54 (62.2)	112 (129)
		100 psi (0.7MPa)	18 (20.8)	33 (38.0)	54 (62.1)	108 (124.4)	225 (259)

Conversions: MPa = psi x 0.7 kgf-cm= lbf-in x 1.15

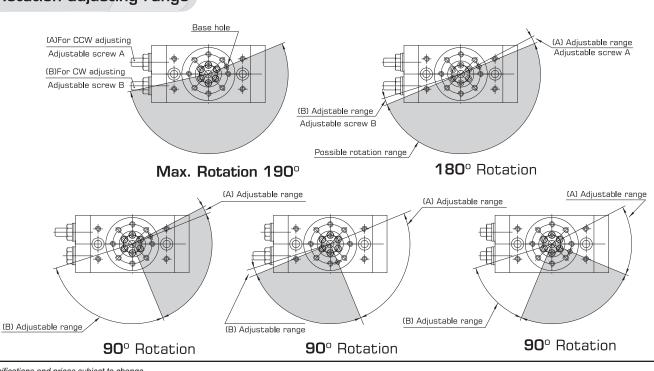


Rotation adjusting range

FRC Series FABCO-AIR ROTARY ACTUATOR

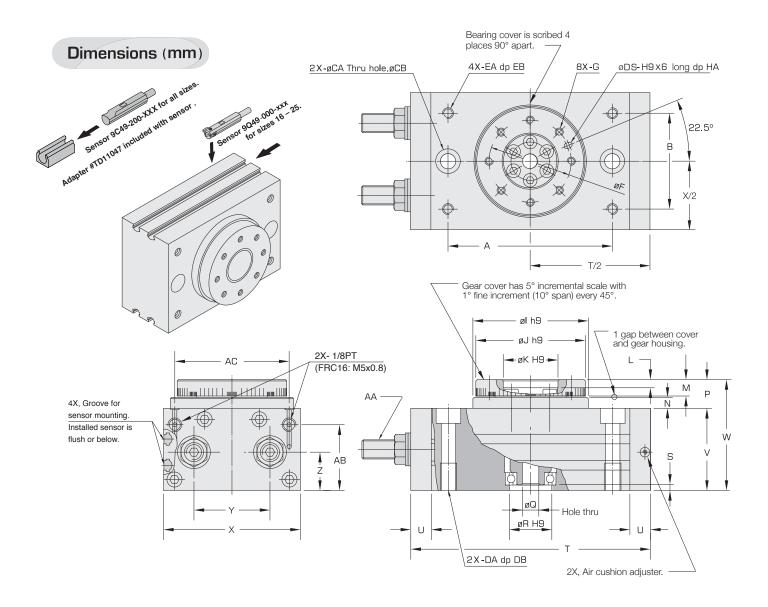

Model	A	В	CA	CB	DA	DB	DS	EA	EB	øF	G	HA	ø	øJ	øК	L
FRC16	76	34	8.6	14	M10X1.5	15	4	M6X1.0	8	43	M6X1.0	4.5	61	60	27	6
FRC20	84	37	8.6	14	M10X1.5	15	4	M6X1.0	8	48	M6X1.0	4.5	67	65	32	4.5
FRC25	100	50	10.2	18	M12X1.75	15	5	M8X1.25	8	55	M8X1.25	6	77	75	35	5.5
FRC32	120	70	10.2	18	M12X1.75	20	4	M8X1.25	8	70	M8X1.25	6	92	90	40	6
FRC40	140	80	10.2	18	M12X1.75	20	4	M8X1.25	12	80	M8X1.25	6	102	100	45	6

Model	M	Ν	Ρ	øQ	øR	S	Т	U	V	W	Х	Y	Z	AA	AB	AC
FRC16	10	6	17	9	17	2	119	13	37	54	65	27.5	15.5	M10X1.0	28.5	50
FRC20	10	6	17	9	22	2	131	14	40	57	70	29	18.5	M10X1.0	32	50
FRC25	12	7	20	10	26	3.5	157	18	46	66	80	36	22	M14X1.5	37.5	63
FRC32	12	8	21	12	31	4	175	15	60	81	100	50	28	M14X1.5	48	83.5
FRC40	12	8	21	18	36	4	195	15	70	91	122	65	33	M20X1.5	58	100

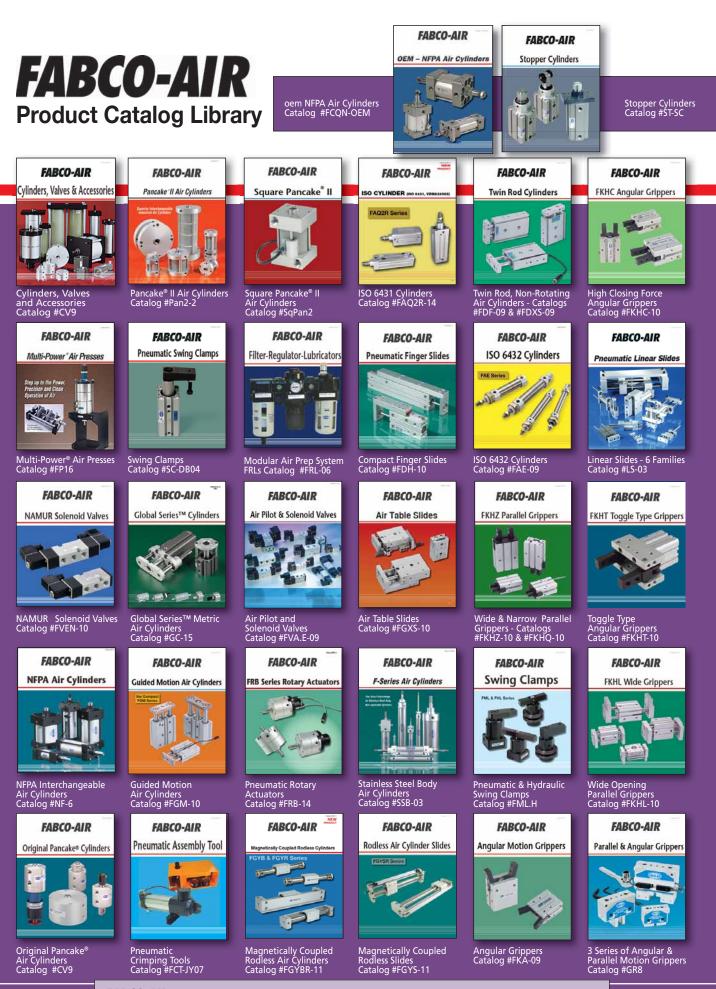

FABCO-AIR, Inc. • 3716 N.E. 49th Avenue • Gainesville, FL 32609 • Tel (352) 373-3578 • Fax (352) 375-8024 • E-Mail: service@fabco-air.com • Web Site: www.fabco-air.com