



NEOLIFT 150 NEOLIFT 300 NEOLIFT 600



PERMANENT LIFTING MAGNETS


LIFTING

APPLICATIONS

Everywhere where steel is handled:

- In the workshop to load, unload machine tools;
- At constructions sites to lift plates and structurals;
- In the warehouse to handle plate and bar stock.

NEW NEOLIFT EASY SWITCH

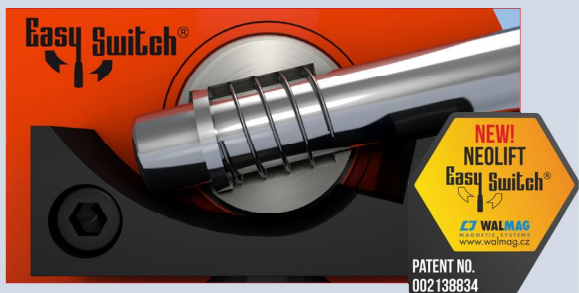

NEW Easy Switch system. The new system allows you to switch the magnet On and Off using just **one hand, saving 40% of time!**

SWITCHING SYSTEM ALLOWS A VERY EASY AND SAFE ON AND OFF OPERATION BY ONE HAND ONLY

- Modern, smart design;
- Tremendous lifting capacity thanks to high energy neodymium magnets;
- Safety factor at least 3:1;
- Increased air gap capability;
- Suitable for both flat and round material;
- Robust, welded body to ensure a long life under heavy duty conditions;
- Solid switching handle with safety locking;
- Ergonomic one hand switching;
- Few moving parts, low maintenance;
- Individual testing and certification of each magnet;
- Made in Czech Republic according to CE and EN 13155 standards.

* **Warranty: 5 years!**

| Model | NEOLIFT | | |
|-----------------------------------|---------|--------|--------|
| | 150 | 300 | 600 |
| Length (mm) | 93 | 152 | 246 |
| Width (mm) | 60 | 100 | 120 |
| Height (mm) (incl. Lifting eye) | 120 | 180 | 180 |
| Weight (kg) | 3 | 10 | 21 |
| Tested Lifting Capacity (kg) | 470 | 1000 | 1900 |
| Workload limit for plates (kg) | 150 | 300 | 600 |
| Workload limit pipe and tube (kg) | 65 | 150 | 300 |
| Ø min/max (mm) | 40/100 | 60/200 | 65/270 |

